



LEVERAGE YOUR OSP INFRASTRUCTURE'S POWER AND COOLING DATA

Engineered to seamlessly integrate into both outside plant cabinets and small inside plant facilities, this compact device revolutionizes remote power and cooling asset monitoring.

With the LTE and fiber connectivity options, extend your reach to remote sites that were previously beyond your grasp.

Experience the future of asset monitoring with the powerful iO mini.



The essential functionalities
of the iO Gateway with the
most compact design.

FEATURES



MULTI-PROTOCOL
GATEWAY



STREAMLINE
DATA TRANSPORT



SECURE REMOTE
MANAGEMENT
PLATFORM



CENTRALIZED
ACCESS



UP TO 10X
CONNECTED
DEVICES



UP TO 250
DATA POINTS

SPECIFICATIONS

GENERAL SPECIFICATIONS

Operating Input Voltage	18 to 60 Vdc (A & B feed) w/ Fail Relay Optional: 120 VAC Power Supply
Operating Temperature	-40 to +65°C (-40 to 149°F)
Dimensions	124.1 mm x 116.40 mm x 37.7 mm (4.91 in. x 4.63 in. x 1.59 in.)
Weight	350g (0.77 lbs.)

COMMUNICATION / NETWORK INTEGRATION

Serial Ports	Up to 2x RS-485 (2-wire)
Ethernet Ports	Front – 10/100Mb, Back – 1Gb
USB	1x USB 2.0
USB OTG	1x micro USB 2.0
Serial Protocols	Modbus RTU (Master/Slave)
IP Protocols	Modbus TCP/IP (Client), SNMP Get v1/v2c/v3, SNMP Agent v1/v2c/v3
Passthrough Protocols	HTTP/HTTPS, Telnet/SSH, FTP/SFTP/SCP
Ethernet Protocols	HTTP/HTTPS
CPU	1GHz Quad-Core
Memory	2 GB DDR3
Disk	16 GB

CERTIFICATIONS


Safety	TBD
Emission	TBD

WHY CHOOSE iO mini ?


In the dynamic landscape of telecommunications, staying connected to your assets has never been more crucial. With our innovative **iO mini**, you can now monitor and manage your outside plant assets with unparalleled ease and efficiency.

Designed to seamlessly integrate into **outside plant cabinets and small inside facilities**, our compact device offers a powerful solution for remote asset monitoring. Whether it's monitoring equipment status, tracking environmental conditions, or ensuring security, our telemetry device provides real-time insights to keep your operations running smoothly.


KEY MARKETS



TELECOMMUNICATIONS



POWER UTILITIES



RAILWAYS



CATV/BROADBAND



POWERFUL & COMPACT MULTI-PROTOCOL GATEWAY

NETWORK CONNECTIVITY

The iO mini offers up to two Ethernet ports with integrated industry-grade security to interface with local smart devices and network/enterprise software. Cellular LTE and STP fiber-based connections are also available as options.

SERIAL CONNECTIVITY

Up to two RS-485 ports to manage two different serial protocols at the same time. It can also provide redundancy for a single serial protocol.

SECURED CONNECTIVITY

Implementing an iO mini will improve the cybersecurity of critical power and cooling infrastructure by employing SNMPv3's ability to authenticate and encrypt payloads. Implementing LDAP authentication can validate users' identities and access rights. The iO mini can create boundaries between Networks by physically separating the Local Area Network (LAN) and Corporate Network.


PASSTHROUGH CAPABILITIES

The passthrough features enable users to maintain existing aspects of their smart devices, such as web, console, and file transfer capabilities, even if they are on a local network. Leverage HTTPS Proxy functionality to gain remote access to unsecured HTTP devices using the latest TLS encryption.

PROTOCOLS

iO mini supports several protocols: HTTP/HTTPS; SNMP get v1, v2, v3; SNMP trap v1, v2, v3; Modbus RTU master/slave; Modbus TCP/IP client; MQTT; SSH; LDAPS; DNS; DHCP; NTP.

SMART, SMALL, RELIABLE AND IT-SECURED MONITORING TOOLS

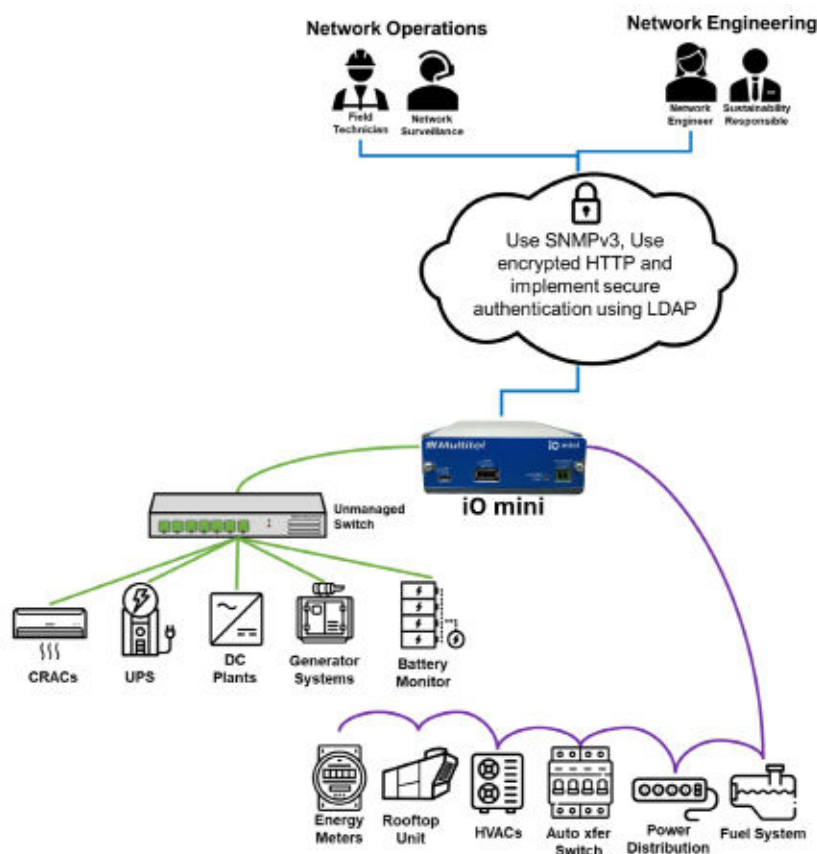

iO mini enables users to improve their existing Outside Plant monitoring solutions, unlocking new levels of efficiency in operations.

Data source dashboard

Status	ID	Datapoint Description	Protocol	Slave ID	IP Address	Value	Actions
●	[Alpha_Max_SNMP1] : DC Plant - Alpha - Cordex CXC HP	SNMP		10.20.4.89	●	Refresh	...
●	S1A11	System Voltage				53.0 V	Refresh
●	S1A13	Input AC Voltage				119.8 V	Refresh
●	S1A13	Total Load Current				10.1 A	Refresh
●	[Alpha_Max_SNMP2] : DC Plant - Alpha - Cordex CXC HP	SNMP		10.20.4.89	●	Refresh	...
●	S2A11	System Voltage				53.0 V	Refresh
●	S2A12	AC Input Voltage				119.8 V	Refresh
●	S2A13	Total Load Current				10.1 A	Refresh
●	[Alpha_Max_SNMP3] : DC Plant - Alpha - Cordex CXC HP	SNMP		10.20.4.89	●	Refresh	...
●	[Alpha_Max_STD] : DC Plant - Alpha - Cordex CXC HP	Modbus TCP/IP	2	10.20.4.89	●	Refresh	...
●	M4A11	System Voltage				53.0 V	Refresh
●	M4A12	AC Input Voltage				119.8 V	Refresh
●	M4A13	Total Load Current				10.1 A	Refresh
●	[Alpha_Max_TRA] : DC Plant - Alpha - Cordex CXC HP	Modbus TCP/IP	2	10.20.4.89	●	Refresh	...

Passthrough

Name	Protocol	Source Port	Destination IP	Destination Port	Additional Port	Action	Status	Web Access
P1	HTTP	8080	10.20.3.42	80	8081	Passthrough	●	Refresh
P2	HTTP	8080	10.20.3.42	81		Passthrough	●	Refresh
P3	HTTP	8080	10.20.3.42	82		Passthrough	●	Refresh
P4	HTTP	8080	10.20.3.42	83		Passthrough	●	Refresh
P5	HTTP	8080	10.20.3.42	84		Passthrough	●	Refresh
P6	HTTP	8080	10.20.3.42	85		Passthrough	●	Refresh
P7	HTTP	8080	10.20.3.42	86		Passthrough	●	Refresh
P8	HTTP	8080	10.20.3.42	87		Passthrough	●	Refresh
P9	HTTP	8080	10.20.3.42	88		Passthrough	●	Refresh

Settings interface

General Parameters	Security	Connections	Protocols	Gateway and IP	Passthrough	System Maintenance	Restart

Multitel

3710 Wilfrid Hamel Blvd.
Quebec (QC) G1P 2J2
Tel 418.847.2255
Toll Free 1.888.685.8483
info@multitel.com

multitel-inc

Take advantage of the power and performance of our most compact multi-protocol gateway.

Contact us today:
multitel.com